



SOLAR WATER HEATING SYSTEM

**10
YEAR
WARRANTY**
for the
**SOLAR
COLLECTOR**

**5
YEAR
WARRANTY**
for the
**SOLAR
TANK**

Product Benefits

- High efficiency resulting in high energy saving
- Eco friendly (zero emissions)
- Long service life and minimum maintenance requirements
- Easy transport and quick installation
- Mounting structure and accessory kits are included
- Original equipment manufacturer Rimasol
- Typhoon Set (Installation system for wind loads up to 200Km/h)
- High-performance collector for all system sizes
- Mounting set available for all types of roofs




version
08/2021

We are not responsible for printing errors.
Technical data subject to change without notice.

www.rimasol.com



SOLAR WATER HEATING SYSTEM

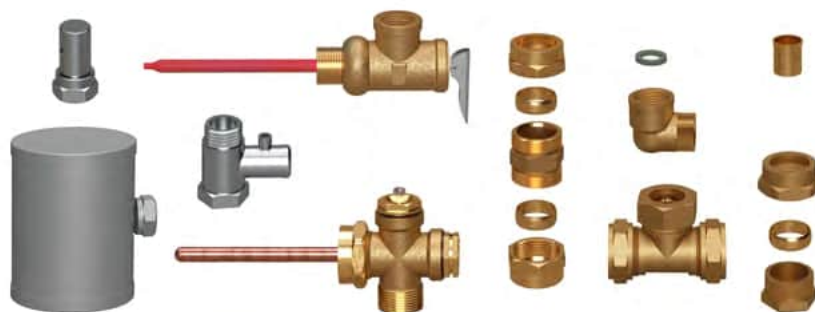

Technical data

Tank	120L	150L	170L	200L	250L	300L
Actual Capacity [ltr]	110	136	154	190	230	276
Tank Length [mm]	1075	1275	1275	1275	1615	1775
Tank (Inner) Diameter [mm]	Ø400	Ø400	Ø440	Ø480	Ø480	Ø480
Tank (Outer) Diameter [mm]	Ø500	Ø500	Ø540	Ø580	Ø580	Ø580
Jacket Type Exchanger Surface [m ²]	0,625	0,625	0,74	0,78	1,19	1,52
Jacket Type Exchanger Capacity [ltr]	6,6	6,6	7,5	7,8	9,9	15,5
Inspection Flange Diameter [mm]	Ø140	Ø140	Ø140	Ø140	Ø140	Ø140
Inner tank material	DCP steel sheet. Thickness 2,5 mm for tank body (EN 10130/2006)					
	DCP steel sheet. Thickness 1,5 mm for jacket type heat exchanger (EN 10130/2006)					
Anticorrosion protection	Internal glass enamel layer (DIN 4753-3) processed at 870o C. Certified material for use with potable water (DIN 51032 & EN 1388-2) Magnesium anode rod protection DIN124382.2					
Welding Type	Metal Inert Gas MIG welding					
Insulation	Hard Polyurethane Foam density 45kg/m3 (DIN 53420), self extinguishing (DIN 4102)					
Back-up heating element	Electric from 1,5 up to 4 kW (according to order)					
External Cover material	Pre-painted galvanised steel sheet 0,5mm (EN 10204)					
Working pressure max	10 bar (tank) tested at 16 bar (EN-12976-2/2006) 3 bar (exchanger) tested at 6 bar (EN 12976-2/2006)					
Working temperature max	95 °C					

Solar Collector

Collector type	Type 15	Type 17	Type 19	Type 20	Type 23	Type 25	Type 27	Type 29
Overall area [m ²]	1.51	1.68	1.96	2.02	2.24	2.52	2.67	2.92
Absorber area [m ²]	1.35	1.51	1.79	1.83	2.03	2.33	2.43	2.71
L x W x H [mm]	1503x1007x103	1420x1183x103	1503x1305x103	2006x1007x103	1893x1183x103	2006x1257x103	2261x1183x103	2006x1457x103
Absorption [%]	95							
Emission [%]	5							